


FRX-Rotor

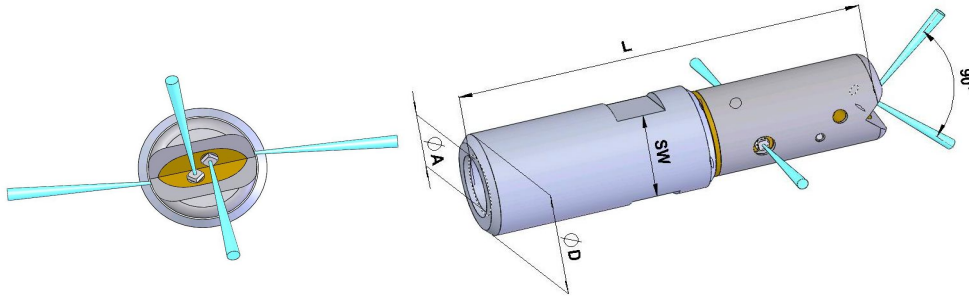

4 x 90°

D mm	L mm	SW mm	A		Artikel-Nr. / part-no.	max. A.T. max.W.P. bar / PSI		
10		8	M7x1F	●	5710138281428	1000/15.000		
			1/16"NPTF	●	5710138281435			
			1/16"UNFMPLHF	○		1500/21.500		
			1/16"UNFMPRHF	○				
			5/16"UNFM	○	5710138281442	1000/15.000		
11			M8x1F	○	5710138281459			
12	53	10	1/8"NPTF	●	5710138281466	1250/18.000		
			1/8"BSPF	●	5710138281473			
			3/8"UNFMPLHF	○	5710138281480	1500/21.500		
			3/8"UNFMPRHF	○	5710138281497			
13		ingen / none	1/8"NPTF	●	5710138281503	1250/18.000		
			1/8"BSPF	●	5710138281510			
			3/8"UNFMPLHF	○	5710138281527	1500/21.500		
			3/8"UNFMPRHF	○	5710138281534			
15		13	M10x1F	○	5710138281541	1000/15.000		
16			1/8"BSPF	●	5710138281558			
18		16	1/4"NPTF	●	5710138281565	1000/15.000		
			1/4"BSPF	●	5710138281572			
			9/16"UNFMPLHF	○	5710138281589	1500/21.500		
			9/16"UNFMPRHF	○	5710138281596			
20		17	M14x1F	○	5710138281602			
22		19	1/4"BSPF	●	5710138281619	1000/15.000		
			3/8"NPTF	●	5710138281626			
			3/8"BSPF	●	5710138281633			
28		25	1/4"BSPF	●	5710138281640	1250/18.000		
			1/2"NPTF	●	5710138281657			
	25	1/2"BSPM	●	5710138281664				
		3/8"BSPM	●	5710138281671				
		M22x1.5M	●	5710138281688				
		M24x1.5M	●	5710138281695				
		M10x1F	○	5710138281701				
40		ingen / none	M24x1.5F	●	5710138281718	1250/18.000		
			1/4"BSPF	●	5710138281725			
			1/4"BSPM	●	5710138281732			
			3/8"BSPM	●	5710138281749			
	27	1/2"BSPM	●	5710138281756				
		ingen / none		M10x1F	○			5710138281763
		27	M22x1.5M	●	5710138281770			
M24x1.5M	●		5710138281787					

Andre gevind efter forespørgsel / Other connections available on request.
M = Han-gevind / Male thread - F = Hun-gevind / Female thread

● Standard
○ Special