
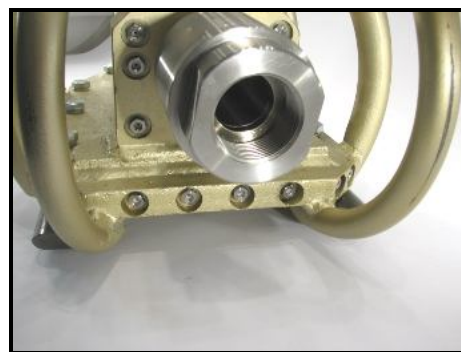


dannozzle®

SAND EVACUATOR

571013881345
10051113

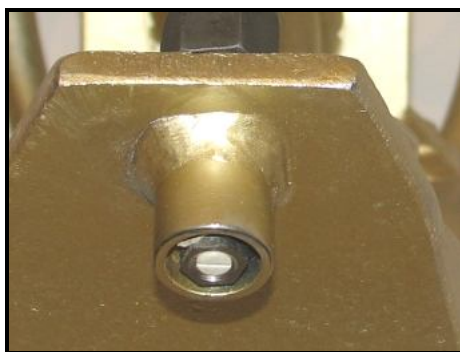

- ADVANTAGE:** Powerful Sand Evacuator for use in pipes from DN200.
- ADVANTAGE:** Comes with roll cage ensuring that the Sand Evacuator always levels itself in case it should roll over.
- ADVANTAGE:** Equipped with interchangeable weights and slide pads in hardened HRC 58 steel underneath to minimize wear and to ensure that the Sand Evacuator stays at the bottom of the pipe.
- ADVANTAGE:** Can be equipped with front spray in 0°, 45° or 90° spray by request. The Sand Evacuator can be seen operating on our homepage.

EAN Nr.	Description	Weight (kg)	Dimensions L x B x H (mm)	Connection	Nozzle inserts	Scope of application
5710138130009	B 00	4,5	180x110x100	1/2"	6 x M 10x1 ceramic	From \geq DN 200
5710138130016	B 01	7,0	320x160x150	3/4"	6 x M 10x1 ceramic	From \geq DN 200
5710138130023	B 02	13,0	350x160x150	1"	6 x M 10x1 ceramic	From \geq DN 400
5710138130030	B 03	22,0	450x190x180	1"	8 x M 10x1 ceramic	From \geq DN 500
5710138130047	B 04	37,0	600x240x210	5/4"	10 x M 10x1 ceramic	From \geq DN 600
5710138130054	B 05	37,0	600x240x210	3/2"	10 x M 10x1 ceramic	From \geq DN 800

Apart from the B 00, all Sand Evacuator products always come equipped with a swivel.

Angles of spray are 0°- 45° outwards and 4° downwards.

www.dannozzle.dk

Østre Allé 6 • 9530 Støvring • tlf. +45 7020 7188 • fax +45 7020 7189 • sales@dannozzle.dk

dannozzle®

SAND EVACUATOR

571013880232
10250412



The Super Sand Evacuator is the big brother to the Sand Evacuator
All the same advantages as the Sand Evacuator, but with even more jetting power!

EAN Nr.	Description	Weight (kg)	Dimensions L x B x H (mm)	Connection	Nozzle inserts	Scope of application
5710138130061	B 02 NA	14,0	350x160x150	1"	8 x M 10x1 ceramic	From DN 400 to DN 800
5710138130078	B 03 NA	23,0	450x190x180	1"	10 x M 10x1 ceramic	From DN 500 to DN 1000
5710138130085	B 04 NA	38,5	600x240x210	5/4"	15 x M 10x1 ceramic	From DN 600 to DN 2000
5710138130092	B 05 NA	38,5	600x240x210	3/2"	15 x M 10x1 ceramic	From DN 800 to DN 2000

Sand Evacuator products always come equipped with a swivel.
Angles of spray are 0°/4°/30°/45° outwards and 7°/8° downwards.

Extra weight and slide pads for all Sand Evacuator products, hardened HRC 58, can also be ordered separately.

L = Left, R = Right.

EAN Nr.		Sand Evacuator	Weight	Thread
5710138190003	L	B02/	1,8	M10
5710138190010	R	B02 NA		
5710138190027	L	B03/	3,9	M12
5710138190034	R	B03 NA		
5710138190041	L	B04/	5,9	M12
5710138190058	R	B04 NA		
5710138190065	L	B05/	5,9	M12
5710138190072	R	B05 NA		

Extra weights for the Super Sand Evacuator with the new coupling that prevents the front from rising.

EAN Nr.	Sand Evacuator	Weight
5710138190089	B02 NA	1,5
5710138190096	B03 NA	2,5
5710138190102	B04 NA	4,5
5710138190119	B05 NA	4,5

All extra weights include screws!

www.dannozzle.dk

Østre Allé 6 • 9530 Støvring • tlf. +45 7020 7188 • fax +45 7020 7189 • sales@dannozzle.dk